


GALVANIZED STEEL TUBE
12.5' X 1 3/4" X 1 3/4"
3/8" DIAMETER HOLES
1" ON CENTER
(FULL LENGTH OF POST)



10'

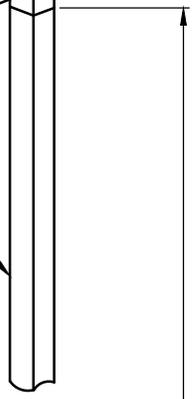

2" X 2" X 30" SLEEVE
TO ALLOW SIGN REMOVAL
AND INSTALLATION

FINISH GRADE

CONCRETE BASE
(24" x 12" DIA.)

2"

24"

EXTEND 4" BEYOND
CONCRETE BASE

4"

1'

NOTES:

1. FORMAT: SECURE ENGINEER'S APPROVAL OF SIGN FORMAT AND INSTALLATION.
2. INSTALLATION:
 - A. INSTALL SIGNS ON THE NORTH-EAST OR SOUTH-WEST CORNERS OF THE INTERSECTION.
 - B. INSTALL THE EDGE OF THE SIGN 2 FEET FROM THE VERTICAL EXTENSION OF THE BACK OF CURB AS NEAR AS POSSIBLE TO THE APPROACH CURB P.C. (POINT OF CURVATURE).
3. NAMED STREETS SHOULD ALSO INCLUDE NUMERIC LOCATION ON RIGHT SIDE OF SIGN.

STREET NAME SIGNS:

1. SIZE 38" X 8".
2. DOUBLE BLADED .080 ALUMINUM WITH RIVETED ENDS AND BACK WASHERS.
3. THE LETTERING FOR NAMES OF STREETS AND HIGHWAYS ON STREET NAME SIGNS SHALL BE COMPOSED OF A COMBINATION OF LOWER-CASE LETTERS WITH INITIAL UPPER-CASE LETTERS (SERIES C).
4. LETTERING ON POST-MOUNTED STREET NAME SIGNS SHOULD BE COMPOSED OF INITIAL UPPER-CASE LETTERS AT LEAST 6 INCHES IN HEIGHT AND LOWER-CASE LETTERS AT LEAST 4.5 INCHES IN HEIGHT (SEE MUTCD FOR SPEEDS GREATER THAN 40 MPH).
5. 3" SERIES C LETTERS IF COORDINATE IS REQUIRED.
6. PRISMATIC GRADE LETTERING ON PRISMATIC GRADE GREEN BACKGROUND.
7. 8" X 8" LOGO LEFT HAND PORTION OF SIGN.
8. LOGO COLOR: BLUE AND GOLD ON ENGINEER GRADE WHITE.
9. LOGO LETTERING "HEBER CITY" W/ HEBER CITY OFFICE BUILDING IN TRIPLICATE FADING INTO BACKGROUND.

REGULATORY SIGNS:

1. ALL STOP (R1-1-30), YIELD (R1-2-36) & SPEED LIMIT (R2-1-24) SIGNS ARE .080 ALUMINUM WITH PRISMATIC REFLECTIVE SHEETING.
2. ALL OTHER SIGNS .080 W/ PRISMATIC GRADE SHEETING.
3. ALL STOP, YIELD, AND SPEED LIMIT SIGNS SHALL BE 7 FEET MINIMUM FROM BOTTOM OF SIGN TO T.B.C. OR ASPHALT SURFACE.
4. THE OUTER EDGE OF ALL SIGNS SHALL BE A MINIMUM OF 2 FEET BEHIND THE FACE OF CURB.

STREET ADDRESS SIGNS

N.T.S

03/12

HEBER CITY
STANDARD DRAWING
STREETS-10