



**RESIDENTIAL BASE PLATE
DETAIL**

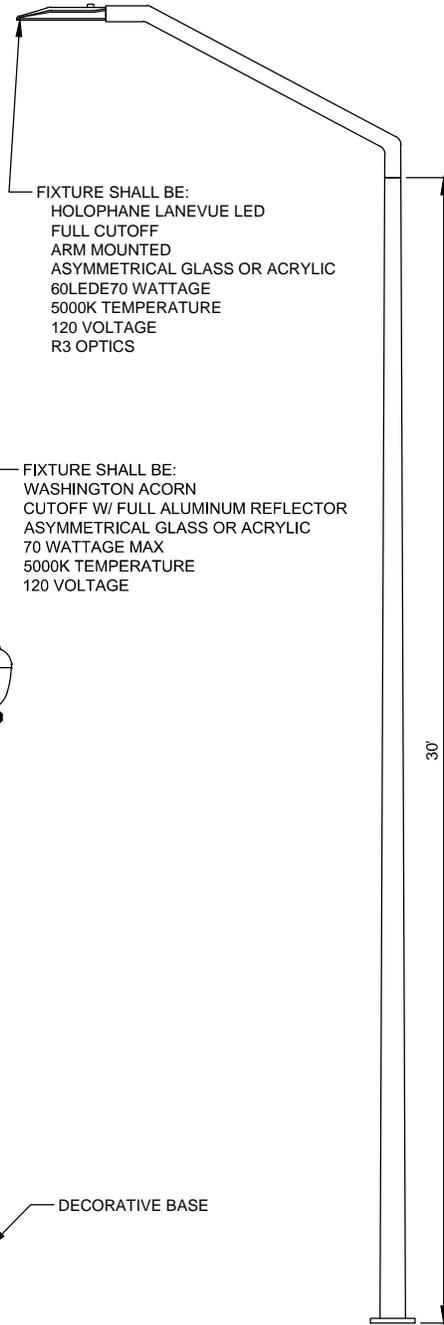


FIXTURE SHALL BE:
HOLOPHANE LANEVUE LED
FULL CUTOFF
ARM MOUNTED
ASYMMETRICAL GLASS OR ACRYLIC
60LEDE70 WATTAGE
5000K TEMPERATURE
120 VOLTAGE
R3 OPTICS


FIXTURE SHALL BE:
WASHINGTON ACORN
CUTOFF W/ FULL ALUMINUM REFLECTOR
ASYMMETRICAL GLASS OR ACRYLIC
70 WATTAGE MAX
5000K TEMPERATURE
120 VOLTAGE

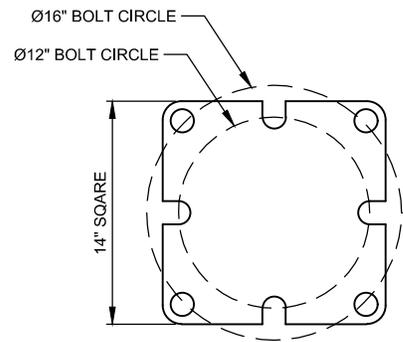

**COMMERCIAL BASE PLATE
DETAIL**

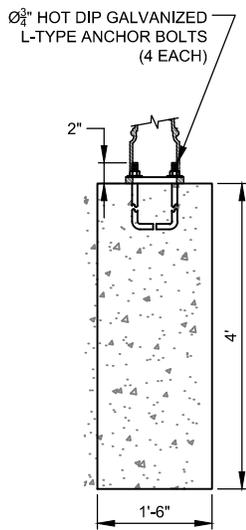

**RESIDENTIAL
CONCRETE BASE**

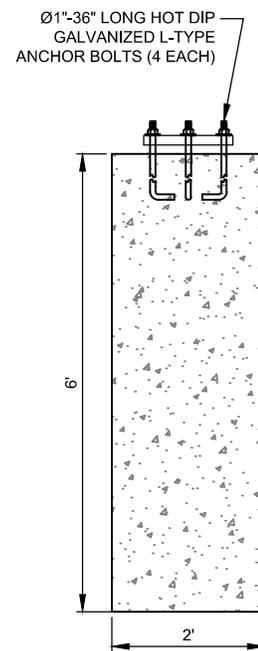

**COMMERCIAL
CONCRETE BASE**

RESIDENTIAL

COMMERCIAL

NOTES:

1. RESIDENTIAL POLES SHALL BE FLUTED OR SMOOTH ALUMINUM, DARK COLORED OR BLACK.
2. COMMERCIAL POLES SHALL BE ROUND TAPERED ALUMINUM, DARK COLORED OR BLACK.
3. LOADING CAPACITY OF POLE SHALL BE 100 POUND RATED FOR A STEADY WIND OF 90 MPH MINIMUM.
4. CONCRETE BASES SHALL BE BACKFILLED WITH SUITABLE MATERIAL COMPACTED TO 95 PERCENT.
5. CONCRETE BASES SHALL HAVE REINFORCING CAGE CONSISTING OF #4 REBAR @ 6" O.C. BOTH WAYS.

STREET LIGHTING

N.T.S

03/12

HEBER CITY
STANDARD DRAWING
STREETS-12