


SINGLE ITEM CONCRETE COLLAR

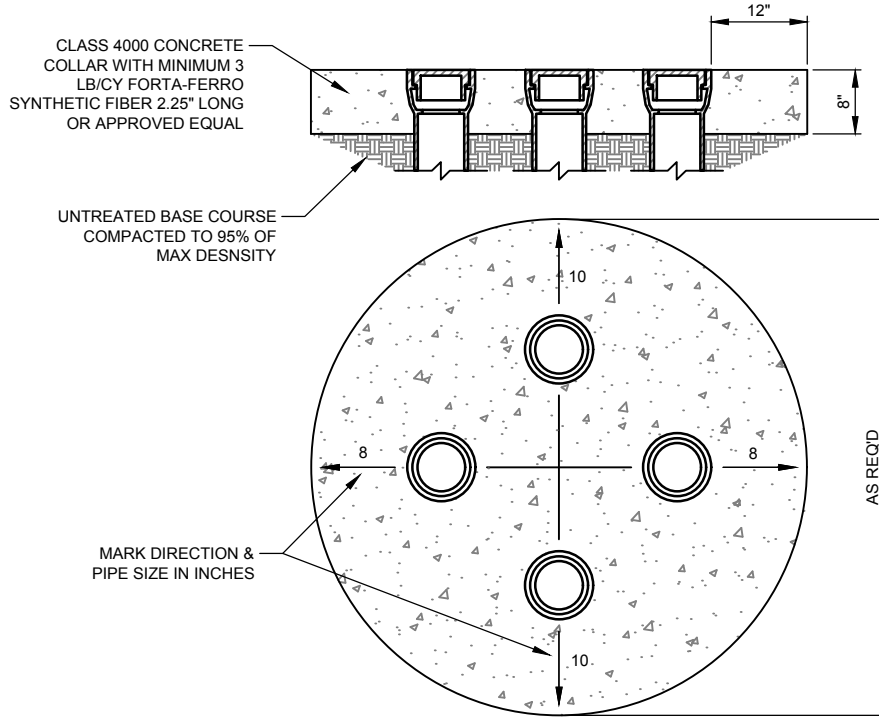

MULTIPLE ITEM CONCRETE COLLAR

NOTES:

1. NEW AND EXISTING VALVE BOXES AND OTHER SIMILAR ITEMS SHALL BE ADJUSTED TO GRADE AFTER PAVING IS COMPLETE.
2. THE SURFACE OF THE ADJUSTED RING SHALL MATCH THE GRADE OF THE CONCRETE COLLAR. THE CONCRETE COLLAR SHALL BE 1/4" TO 3/8" BELOW THE ADJACENT PAVED SURFACE.
3. ASPHALT SHALL BE CUT IN STRAIGHT VERTICAL LINES AT COLLAR EDGES.
4. MARK CONCRETE COLLAR WITH DIRECTION ARROW AND PIPE SIZE IN INCHES.
5. SIZES AND CONFIGURATIONS FOR EXAMPLE ONLY. SHOW ACTUAL CONFIGURATION FOR EACH SITUATION.
6. WHERE WHIRLYGIG SYSTEMS (OR EQUAL) ARE USED TO BRING MANHOLE COLLARS TO GRADE IN PLACE OF CONCRETE GRADE RINGS, THE CONCRETE COLLAR SHALL EXTEND ALL THE WAY TO THE CONE OR HIGHEST MANHOLE SECTION.

UTILITY CONCRETE COLLAR

V:\ENGR\StdSpec\StdSpec 2019\Drawg Files\UTILITIES-4.dwg - Conc Collar - 2/06/2019 12:22pm, rfunk


HORROCKS
ENGINEERS

728 WEST 100 SOUTH #2
HEBER CITY, UTAH 84032
(435) 654-2226

DATE: FEBRUARY 2019

SCALE: N.T.S.

75 NORTH MAIN STREET
HEBER CITY, UTAH 84032
(435) 654-0757



HEBER CITY
STANDARD DRAWING

UTILITIES-4